
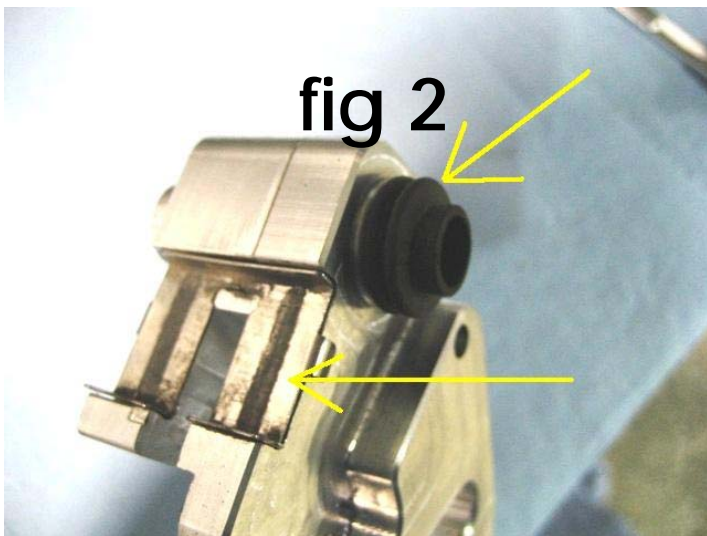
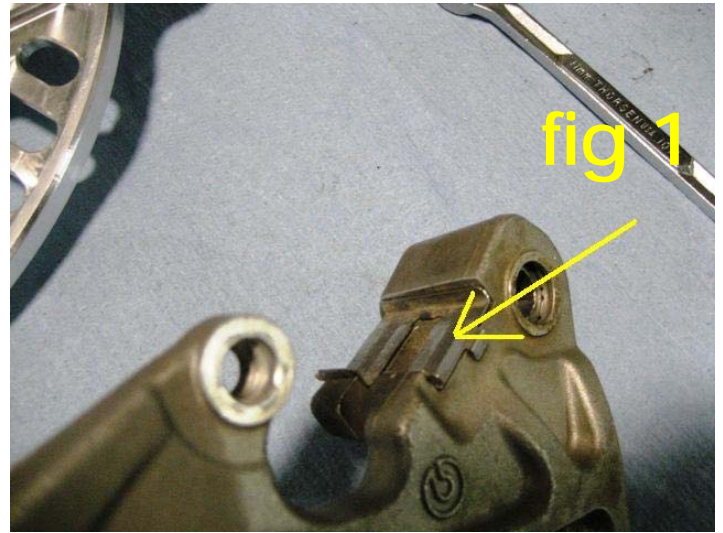


Rear Disk Guard Installation

1. Remove rear wheel
2. Remove brake pads from caliber
3. Remove caliber from stock brake carrier (11mm wrench).
4. Remove rubber boot from caliber guide pin
5. Remove brake pad wear plate from stock carrier (fig 1)
6. Install rubber guide boot and carrier wear plate into new disk guard (fig 2)
7. Install brake caliber to disk guard (use Loctite on bolt).
8. Re-install brake pads and rear wheel

UPDATED
THE REAR DISC GUARD
NOW INCLUDES TWO
AXLE SPACERS.
USE THE CORRECT ONE
FOR YOUR BIKE

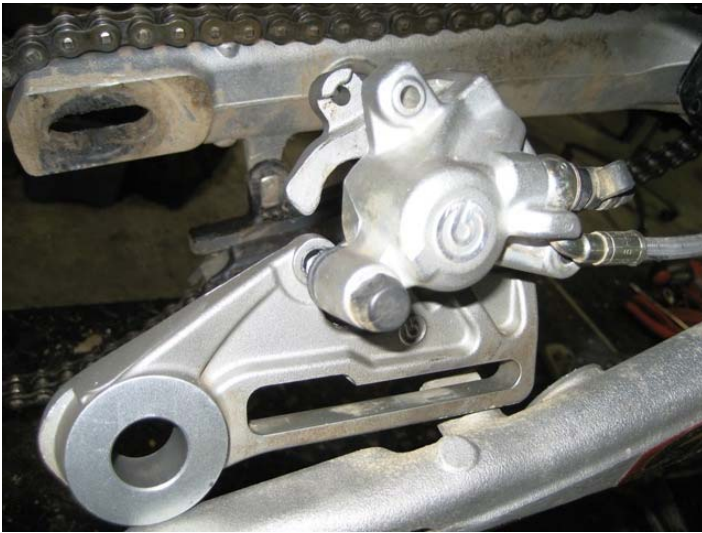

UPDATED
THE REAR DISC GUARD
NOW INCLUDES TWO
AXLE SPACERS.
USE THE CORRECT ONE
FOR YOUR BIKE

